

Blue King

Comfort, durability and efficiency combined in one cleaning gun

Powerful cleaning using less water

The Blue King is a superior cleaning gun with many special qualities.

With its compact size and ergonomic handle, it fits comfortably in the hand. The velvety soft rubber surface adds further comfort.

The spray pattern of the Blue King is unsurpassed. Due to be exactly positioned nozzle tip, there is a very equal distribution of water, wherein with the trigger the shape of the jet can be changed easily from a wide cone to a narrow point. A precise adjustment of spray pattern and trigger position is possible with the set screw at the rear. With the out folding clip that can be done quickly and without any tools.

The nozzle has the revolutionary flat design from AKBO so that dripping is prevented during spraying, even with the use of the widest jet. In addition, the orifice is dimensioned such that the gun uses at least 16% less water than a regular cleaning gun.


The Blue King is available both with and without a trigger guard and is also available with a swivel coupling on the inlet. For detailed technical information, please refer to the next page.



Variable jet

Although all materials can handle temperatures up to 95°C, special precautions are recommended if hot water is used.

The gun is not suitable for steam!

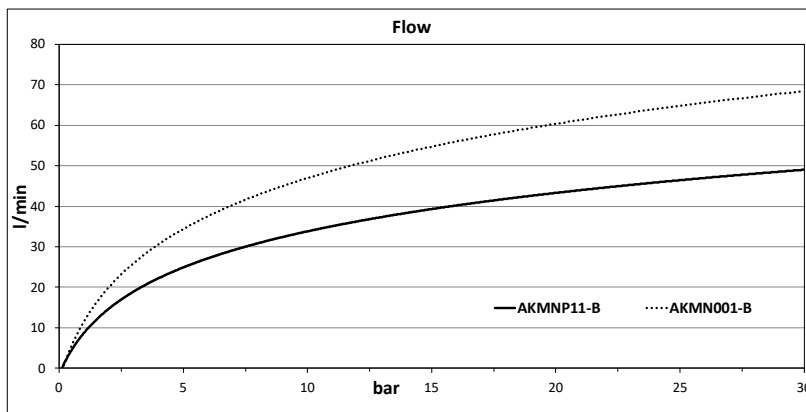

Water flow when trigger is fully squeezed, depending on pressure.

A ball bearing swivel on a gun improves user-friendliness and extends the lifespan of the hose. See the "Swivel couplings" page for more information.

Available models:



AKMN011-B




AKMNP11-B
with trigger guard



AKMNP11-B-SW12
with trigger guard and swivel 1/2" BSP fem.

All article numbers in **bold** are available from stock.

Characteristics of the Blue King

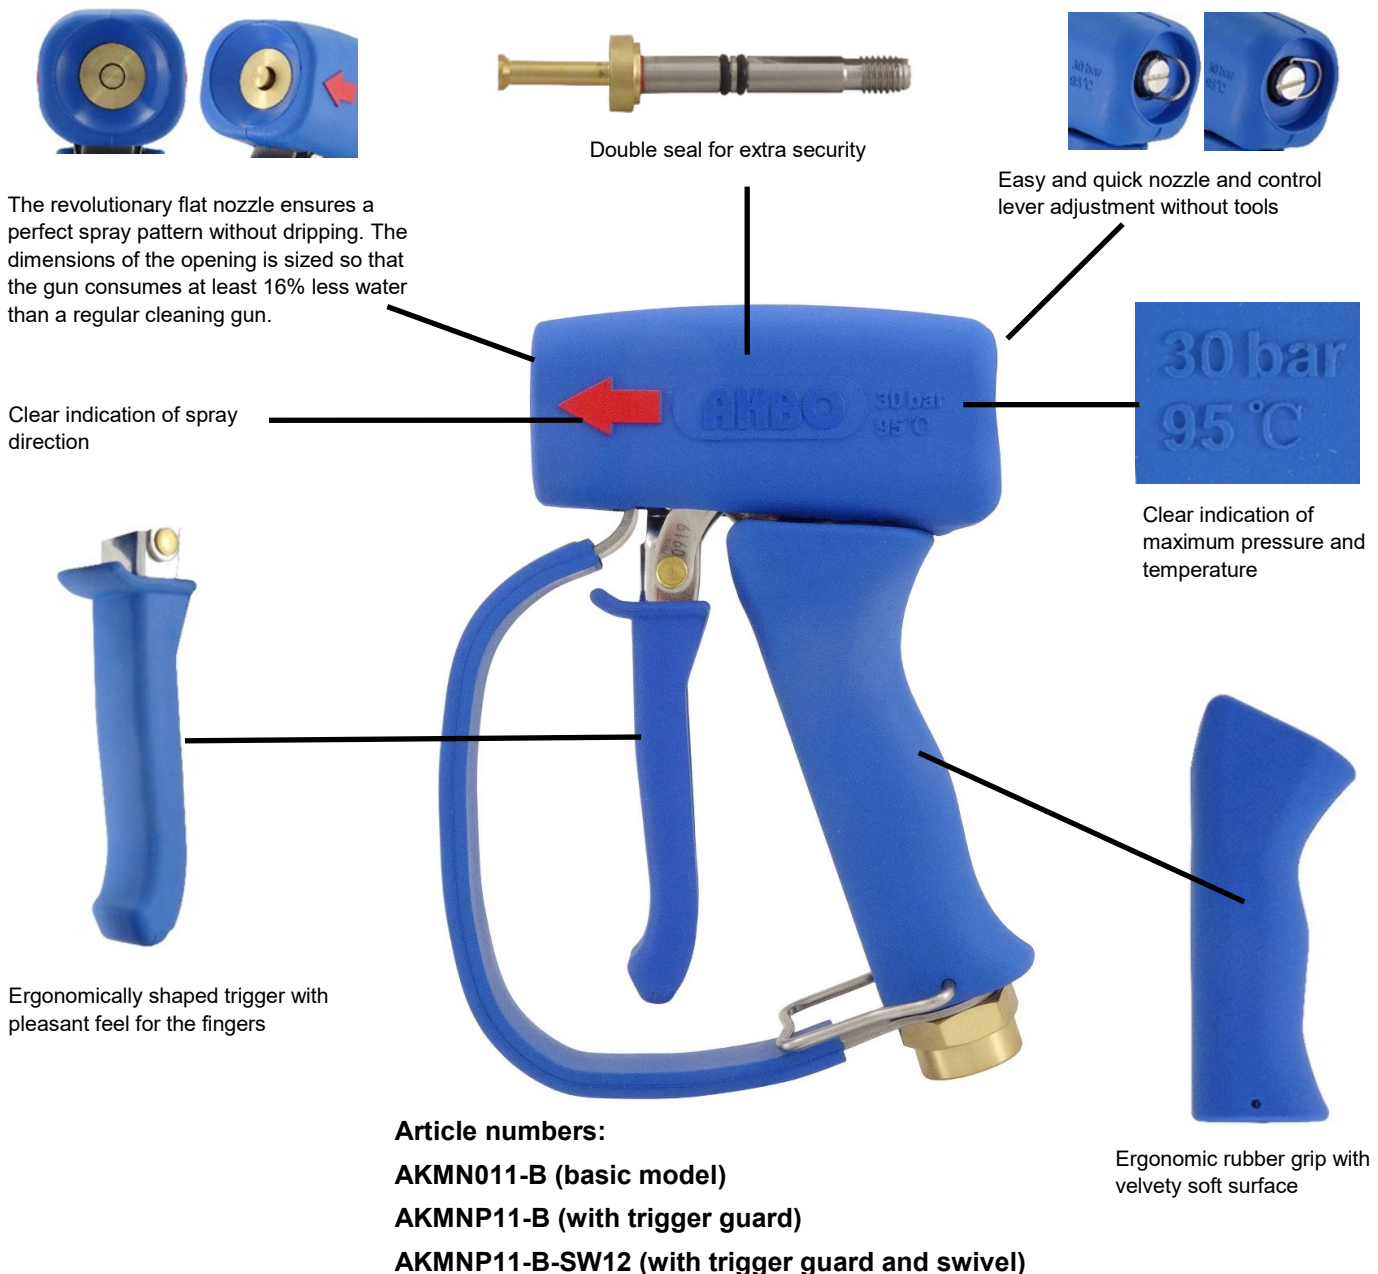

Article numbers:
AKMN011-B (basic model)
AKMNP11-B (with trigger guard)
AKMNP11-B-SW12 (with trigger guard and swivel)

Pictured is the version with AKBO logo. Also available with KING logo or with your own logo (starting from 100 pieces). See page "Personalisation" in this catalogue.

Technical data

	AKMN011-B	AKMNP11-B / AKMNP11-B-SW12
Body material	Brass CuZn39Pb3	Brass CuZn39Pb3
Trigger, pusher en trigger guard	St. st. X5CrNi18-10 (AISI 304)	St. st. X5CrNi18-10 (AISI 304)
Nozzle-pin en spring	St. st. X5CrNi17Mo-12-2 (AISI 316)	St. st. X5CrNi17Mo-12-2 (AISI 316)
Rubber casing	EPDM	EPDM
Seals	EPDM (FDA)	EPDM (FDA)
Connection	1/2" BSP female	1/2" BSP female
Maximum temperature	95 °C	95 °C
Maximum pressure	30 bar	30 bar
Waterflow at 4 bar	22,2 l/min	22,2 l/min
Weight	706 g	880 g / 1014 g
Dimensions	170 x 115 x 43 mm	190 x 145 x 43 mm / 210 x 145 x 43 mm