

# Chrome-plated brass cleaning guns

With non-slip handle and rubber-insulated stainless steel trigger

This brass gun is coated with a protective layer of chrome. It is available in blue, in a white or blue version with trigger guard and also available with pre-mounted swivel coupling. And if you need a version with NPT female connection, you can contact us. For detailed technical information, please refer to the next page.


- Solid brass body, coated with chrome
- Strong rubber cover with good resistance to animal fats (including chicken fat)
- Insulated trigger for increased grip, comfort and protection against high temperatures
- Double internal seals for additional security
- Continuously adjustable spray pattern via trigger

A ball bearing swivel on a gun improves user friendliness and extends the life span of the hose. See the "Swivel Couplings" page for more information.



Although all materials can handle temperatures up to 95°C, special precautions are recommended if hot water is used.

**The gun is not suitable for steam!**

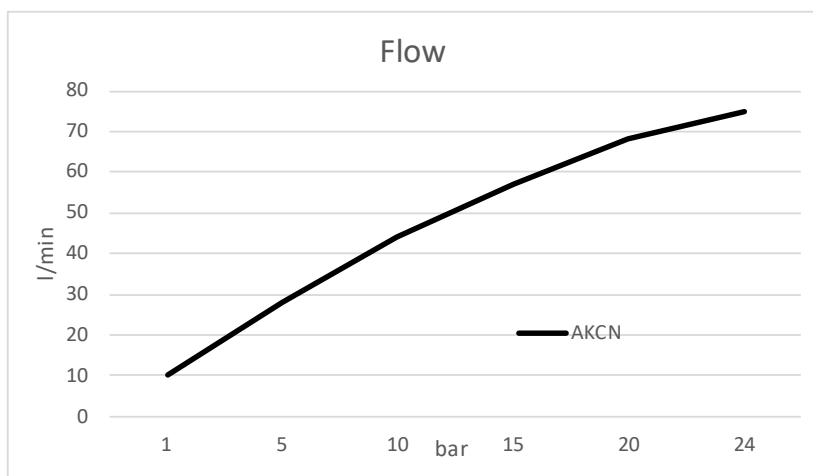

Water flow when trigger is fully squeezed, depending on pressure

**It is possible to order a cleaning gun with your own logo (from 200 pieces), see page "Personalisation".**

Available models:



**AKCN001-B** (blue)



**AKCNP01-B**  
blue with trigger guard

**AKCNP01-W**  
white with trigger guard

**AKCNP01-W-U**  
white with trigger guard and 1/2"NPT female




**AKCNP01-B-SW12** (blue)  
with swivel 1/2" BSP female

**AKCNP01-W-SW12** (white)  
with swivel 3/4" BSP female

All article numbers in **bold** are available from stock.

# Features of the chrome-plated brass cleaning gun

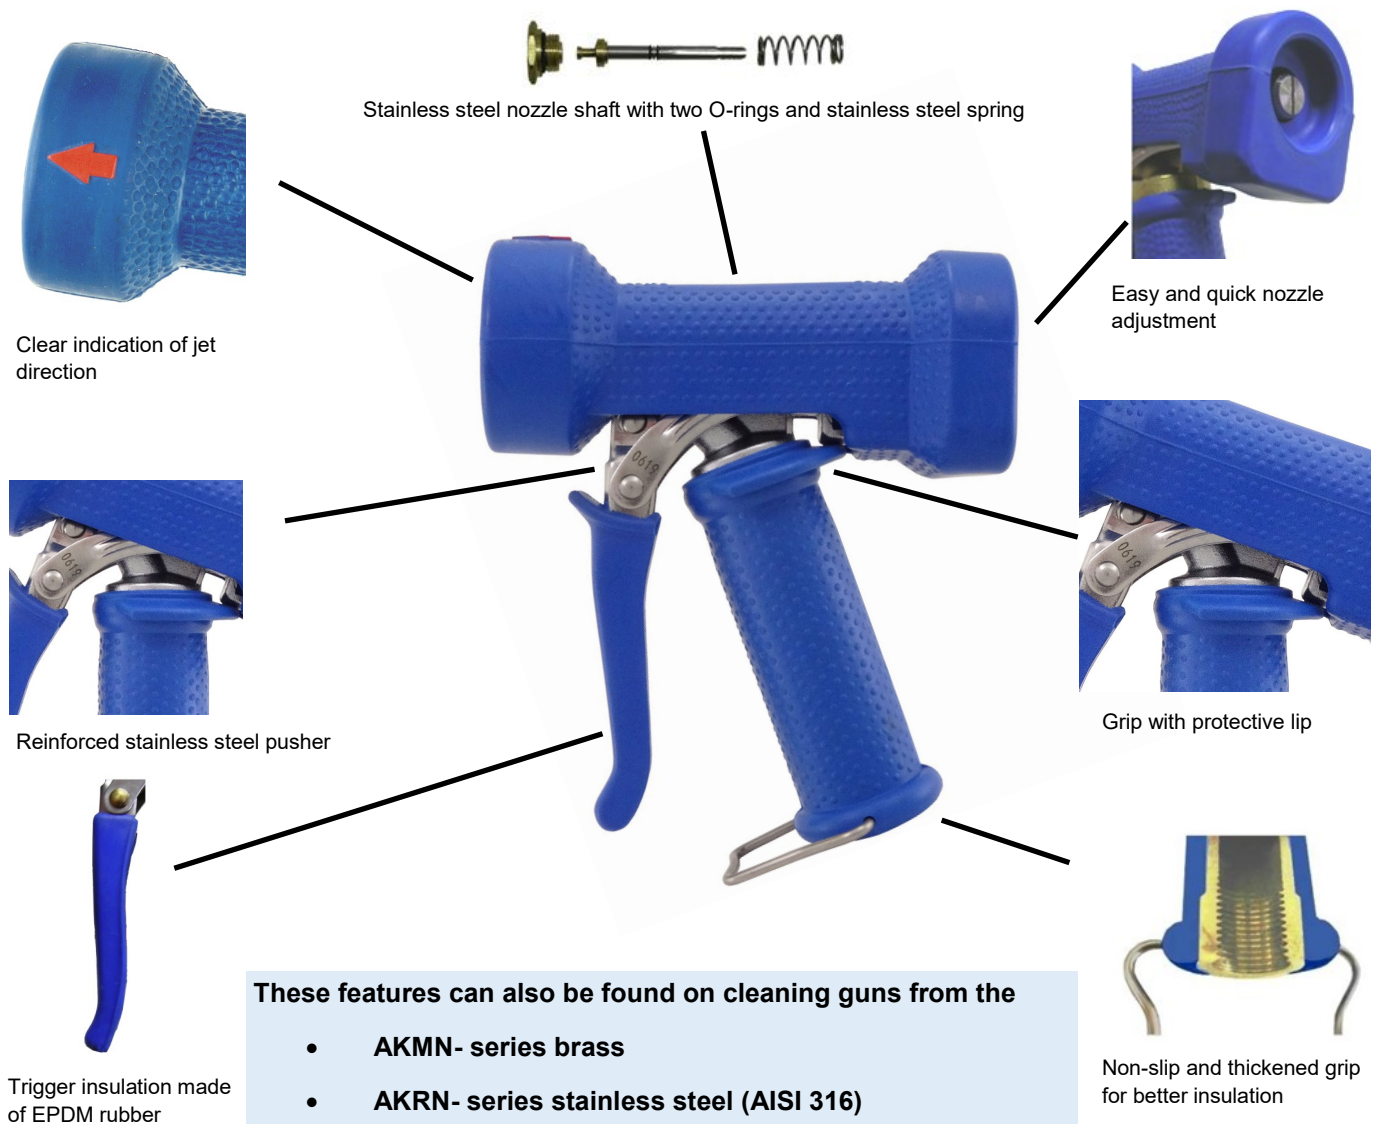

**These features can also be found on cleaning guns from the**

- **AKMN- series brass**
- **AKRN- series stainless steel (AISI 316)**
- **AKMB- series brass high flow rate**
- **AKRB- series stainless steel (AISI 316) high flow rate**

## Technical data

|  | AKCN001-B / AKCNP01-B/W/W-U*                       | AKCNP01-B/W-SW12                 |
|--|--|----------------------------------|
| <b>Body material</b>                     | Brass Ms58Pb3 + Cr layer                           | Brass Ms58Pb3 + Cr layer         |
| <b>Trigger, pusher and trigger guard</b> | St.st. X5CrNi18-10 (AISI 304)                      | St.st X5CrNi18-10 (AISI 304)     |
| <b>Nozzle shaft and spring</b>           | St. st X5CrNi17Mo-12-2 (AISI 316)                  | St.st X5CrNi17Mo-12-2 (AISI 316) |
| <b>Rubber casing</b>                     | EPDM   | EPDM                             |
| <b>Seals</b>                             | EPDM (FDA)   | EPDM (FDA)                       |
| <b>Connection</b>                        | 1/2" BSP fem. thread / W-U* = 1/2" NPT fem. thread | 1/2" BSP female thread           |
| <b>Maximum temperature</b>               | 95 °C  | 95 °C                            |
| <b>Maximum pressure</b>                  | 24 bar   | 24 bar                           |
| <b>Waterflow at 5 bar</b>                | 28 l/min   | 28 l/min                         |
| <b>Weight</b>                            | 867 g / 1016 g                                     | 1110 g                           |
| <b>Dimensions</b>                        | 145 x 56 x 165 mm / 195 x 56 x 165 mm              | 195 x 56 x 165 mm                |

**It is possible to order a cleaning gun with your own logo (from 200 pieces).**