

Twister series spray heads


The Twister series nozzles are professional sprayers with a high water flow. They are ideal for cleaning large areas or objects in a short time. With the turnable head, you can open and close the nozzle, accurately adjust the spray angle and then spray with it effortlessly.


They are available in three sizes: the Twister XL with a 1" connection, the Twister L with a 3/4" connection and the Twister M with a 1/2" connection.

Truck cleaning, ship cleaning, tank cleaning, site


Applications

cleaning, etc.





Although all materials can handle temperatures up to 60 °C, special precautions are recommended if hot water is used.

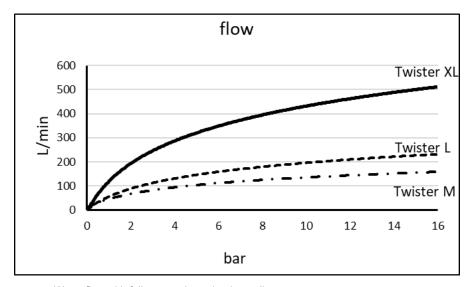

Water flow with fully opened nozzle, depending on pressure

1/2" BSPP male, 60° conical seal

TWRWR02M

Available models:

TWRWR02L 3/4" BSPP male, 60° conical seal



TWRWR02XL
1" BSPP male, 60° conical seal

All article numbers in **bold** are available from stock.

Technical specifications

	TWRWR02XL	TWRWR02L	TWRWR02M
Weight	800 g	480 g	345 g
Dimensions (L x W)	120 x 79 mm	116 x 63 mm	113 x 55 mm
Materials of body	St. st. (AISI 304),POM, EPDM	St. st. (AISI 304), POM, EPDM	St. st. (AISI 304), POM, EPDM
Maximum pressure	16 bar	16 bar	16 bar
Maximum temperature	60 °C	60 °C	60 °C
Connection	1" BSPP male, 60° con. seal	3/4" BSPP male, 60° con. seal	1/2" BSPP male, 60° con. seal