

Baby series cleaning guns

Compact model with low water consumption

The Baby series pistols are compact and have the trigger at the rear of the grip. For users with small hands this is a suitable alternative. The clear red arrow indicates the jet direction. The aluminium and brass models have EPDM seals, the stainless steel model has Viton seals.

Of this compact model, we also have variants with the possibility of mounting a lance.

There are more models with the trigger at the rear. Look further in our catalogue.

A swivel on a gun inlet improves user-friendliness and extends hose life. See the "Swivel couplings" page for more information.

Available models:




BABTN01-B
Aluminium

BMBTN01-B
Brass

BRBTN01-B
Stainless steel

All article numbers in **bold** are available from stock.

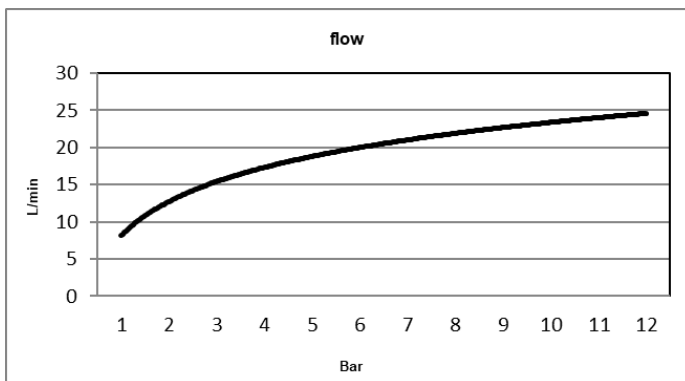

Water flow when trigger is fully squeezed, depending on pressure.

Variable jet

Although all materials can handle temperatures up to 50/95 °C, special precautions are recommended if hot water is used.

The gun is not suitable for steam!



Technical specifications

	BABTN01-B	BMBTN01-B	BRBTN01-B
Body material	Aluminium	Brass Ms58Pb3 (DIN)	St. st. X5CrNi17Mo-12-2 (AISI 316)
Trigger and pusher	St. st. X5CrNi18-10 (AISI 304)	St. st. X5CrNi18-10 (AISI 304)	St. st. X5CrNi18-10 (AISI 304)
Nozzle shaft and spring	St. st. X5CrNi17Mo-12-2 (AISI 316)	St. st. X5CrNi17Mo-12-2 (AISI 316)	St. st. X5CrNi17Mo-12-2 (AISI 316)
Rubber insulation	EPDM (FDA)	EPDM (FDA)	EPDM (FDA)
Seals	EPDM (FDA)	EPDM (FDA)	VITON (FDA)
Inlet connection	1/2" BSP Female	1/2" BSP Female	1/2" BSP Female
Maximum temperature	50 °C (122 °F)	95 °C (231 °F)	95 °C (231 °F)
Maximum pressure	12 bar	25 bar	25 bar
Flow at 5 bar	18 l/min	18 l/min	18 l/min
Weight	360 g	622 g	740 g
Size	135 x 50 x 135 mm	135 x 50 x 135 mm	135 x 50 x 135 mm